

LaserCheck

Laser Power Meter



Features

- Handheld laser power meter
- Wavelength range: 400 nm to 1064 nm
- User-selectable spectral compensation
- Auto-ranging with peak sample and hold
- For CW and >1 MHz lasers

Device Specifications


C24

Model	LaserCheck
Active Area Diameter (mm)	8
Spectral Range (nm)	400 to 1064
Accuracy (%)	±5
Measurement Range ¹	
without Attenuator	10 µW to 10 mW
with Attenuator	1 mW to 1W
Display Power Ranges	9.99 µW to 999 mW
Calibration Uncertainty (%) (k=2)	5
Minimum Power Resolution (µW)	0.01
Maximum Peak Power Density	
without Attenuator	0.5 W/cm ²
with Attenuator	30 W/cm ²
Display	3-digit LCD display with power unit indicator
Compliance	CE, WEEE, RoHS
Dimensions (H x W x D)	168 x 24 x 20 mm (6.6 x 0.9 x 0.7 in.)
Weight	44 g (0.09 lbs.)
Part Number (RoHS)	1098293**


¹ Power range is wavelength dependent. See charts below. Ensure peak power density does not exceed limits to avoid localized diode saturation.

** C24 Quick Ship program: eligible for next business day shipment.

LaserCheck

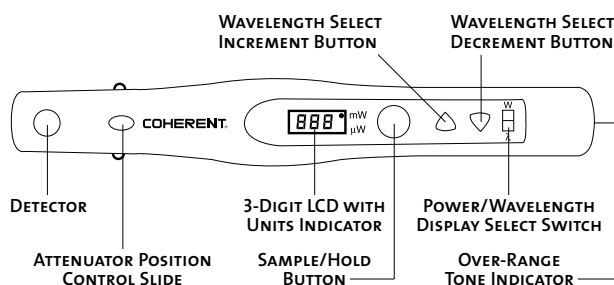

Measurable Power vs. Wavelength
LaserCheck without Attenuator

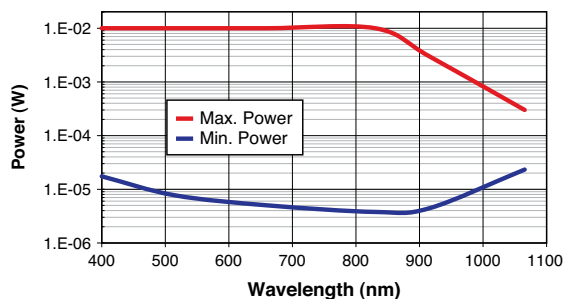

Measurable Power vs. Wavelength
LaserCheck with Attenuator

