

FEATURES

- 1.8 J at 532 nm
- 5 or 10 Hz repetition rate
- Ultrastable energy output
- Excellent beam profile
- Easy maintenance
- Computer control

APPLICATIONS

- Pump laser for ultrafast TVW systems
- Material Processing
- Instrumentation
- Ideal pump for OPO and dye lasers

SAGA HP

Flashlamp-Pumped Nd:YAG Laser Series





SAGA HP

Flashlamp-pumped Nd:YAG laser series

The most efficient Nd:YAG laser at 10Hz

The SAGA HP is the most efficient and compact flashlamp-pumped solid-state laser on the market, producing 1.8 J per pulse at 532 nm at 5Hz or 10Hz.

It features pumping chambers with high efficiency diffusive coupling, that ensures high beam quality and high efficiency. Its original optical cavity design based on an unstable resonator and a variable reflectivity mirror enhances energy extraction. The beam exhibits a very homogeneous Top Hat profile in the near field.

The use of compact housing structure ensures an excellent short and long term alignment stability.

Different harmonic generators on pre-aligned mounts extend the wavelength range to the second, third and fourth harmonics. They are integrated in a temperature regulated housing for optimum long term performances.

Specifications


Version	HP
Wavelength (nm)	532 ⁽¹⁾
Repetition rate (Hz)	5 or 10
Energy per pulse (J)	1.8
Pulse to pulse energy stability (% rms)	< 1.2
Pulse duration FWHM (ns)	4 - 8
Time jitter (ns)	+/-1
Polarization	Vertical
Beam diameter (mm)	~ 15
Divergence (mrad)	0.2
Beam pointing stability (μrad)	+ / - 50
Spatial beam profile (near field)	Top hat
Power Consumption (kW)	2.4

⁽¹⁾IR (1064 nm) and UV (355 or 266 nm) available on request

Physical characteristics (Size*: H x W x L)

Power supply	650 (20.9) x 600 (22) x 830 (31.1)
Cooling unit	485 (19.1) x 210 (8.3) x 770 (30.3)
Laser Head	188 (7.4) x 288 (11.34) x 1100 (43.3)

*Dimensions are given in cm (in)

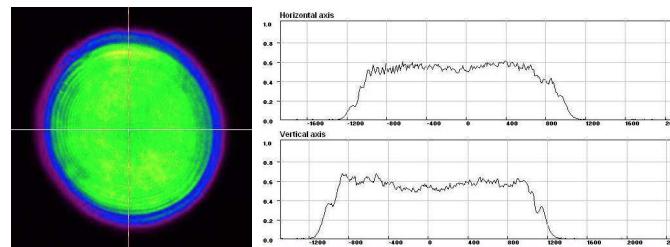


Typical Saga HP beam profile at 532 nm

Utilities and environment requirements

Voltage (VAC)	208 – 230 +/-5% single φ
Frequency (Hz)	50 – 60
Water	Flow > 10 L/min
	Static pressure > 2.7 gal /min
Temperature	2-6 bars 30 -90 psi
Operating systems	10-25°C
	Windows 98, 2000, NT, XP

Long term stability of SAGA HP over 10 hours

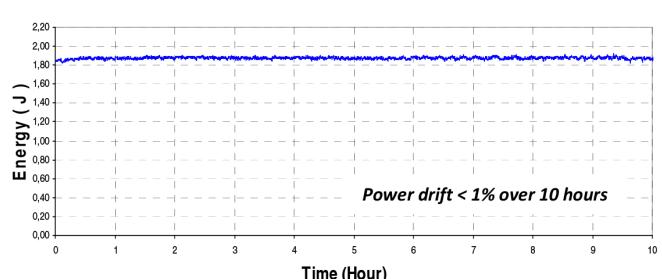

Europe
Thales Optronique S.A.S.
2, avenue Gay-Lussac – CS 90502
78995 Élancourt Cedex – FRANCE
Tél. : + 33 (0)1 30 96 89 45
Fax : +33 (0)1 30 96 89 59
thales-laser@fr.thalesgroup.com

Japan
Thales Japan K.K.
Akasaka Tameike Tower 8F.,
2-17-7, Akasaka, Minato-ku,
Tokyo 107-0052 - JAPAN
Tel : +81 3 6234 8150
Fax:+81 3 6234 8101

North America
Thales Components Corporation Inc.
40G Commerce Way, PO Box 540
Totowa, New Jersey 07511-0540 USA
Tel.: + 1 (973) 812-9000
Fax: +1 (973) 812-9050